


## Properties and Specification

PRODUCT PROPERTIES	UNITS	METHOD	TYPICAL*	SPECIFICATION
Density @ 15 0C	kg/l	D 1298	0.926	0.92 - 0.94
Kinematic Viscosity @ 40 0C	cSt	D 445	330.0	Report
Kinematic Viscosity @ 100 0C	cSt	D 445	21.0	19 - 23
Pour Point	deg C	D 97	0 ?	+20 max
Total Sulfur Content	% wt	D 4294	1.7	3.0 max
Flash Point	deg C	D 92	270	240 min
Carbon Type Analysis	Ca %	D 2140	20.0	19 - 26
	Cn %	D 2140	23.0	Report
	Cp %	D 2140	57.0	Report
% DMSO Extract (PCA)	% wt	IP 346	2.7	< 3.0
Anline Point <i>↓ 40-50 好点</i> <i>51-55 正常</i>	deg C	D 611	<i>70-76</i> 92.0	95 Max
Refractive Index@20 C	N20/d	D 1747	1.5165	1.5100 - 1.5300
VGC	-	D 2501	0.856	0.80 - 0.90

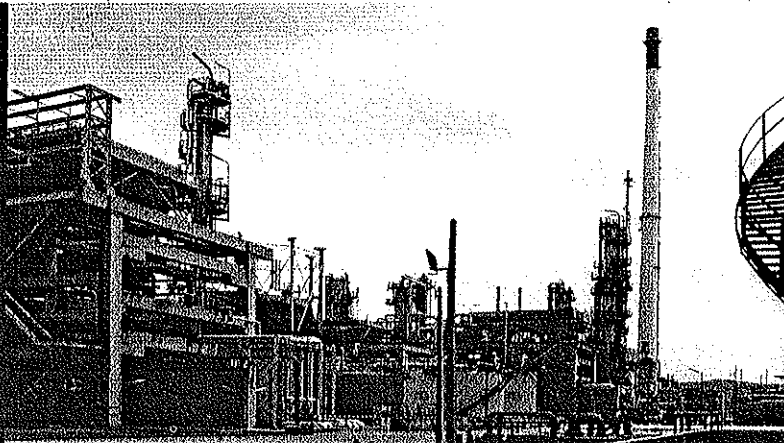

### Further information

Thal Lube Base supplies a full range of lube base oils, process oils, waxes and bitumen product. Please contact our representative or contact us at [www.thailube.co.th](http://www.thailube.co.th), for more information on other products.